

/ Descriptions

SOT-23

/ Features


2.500V;	0.4%,0.8%;	1.0mA	100mA;	;
$V_O=V_{ref}$ 37V;	(:400μA);	(	:0.15Ω)	

/ Applications

/ Equivalent Circuit



/ Pinning




/ hFE Classifications & Marking




--	--

BR431M


/ Electrical Characteristic Curve

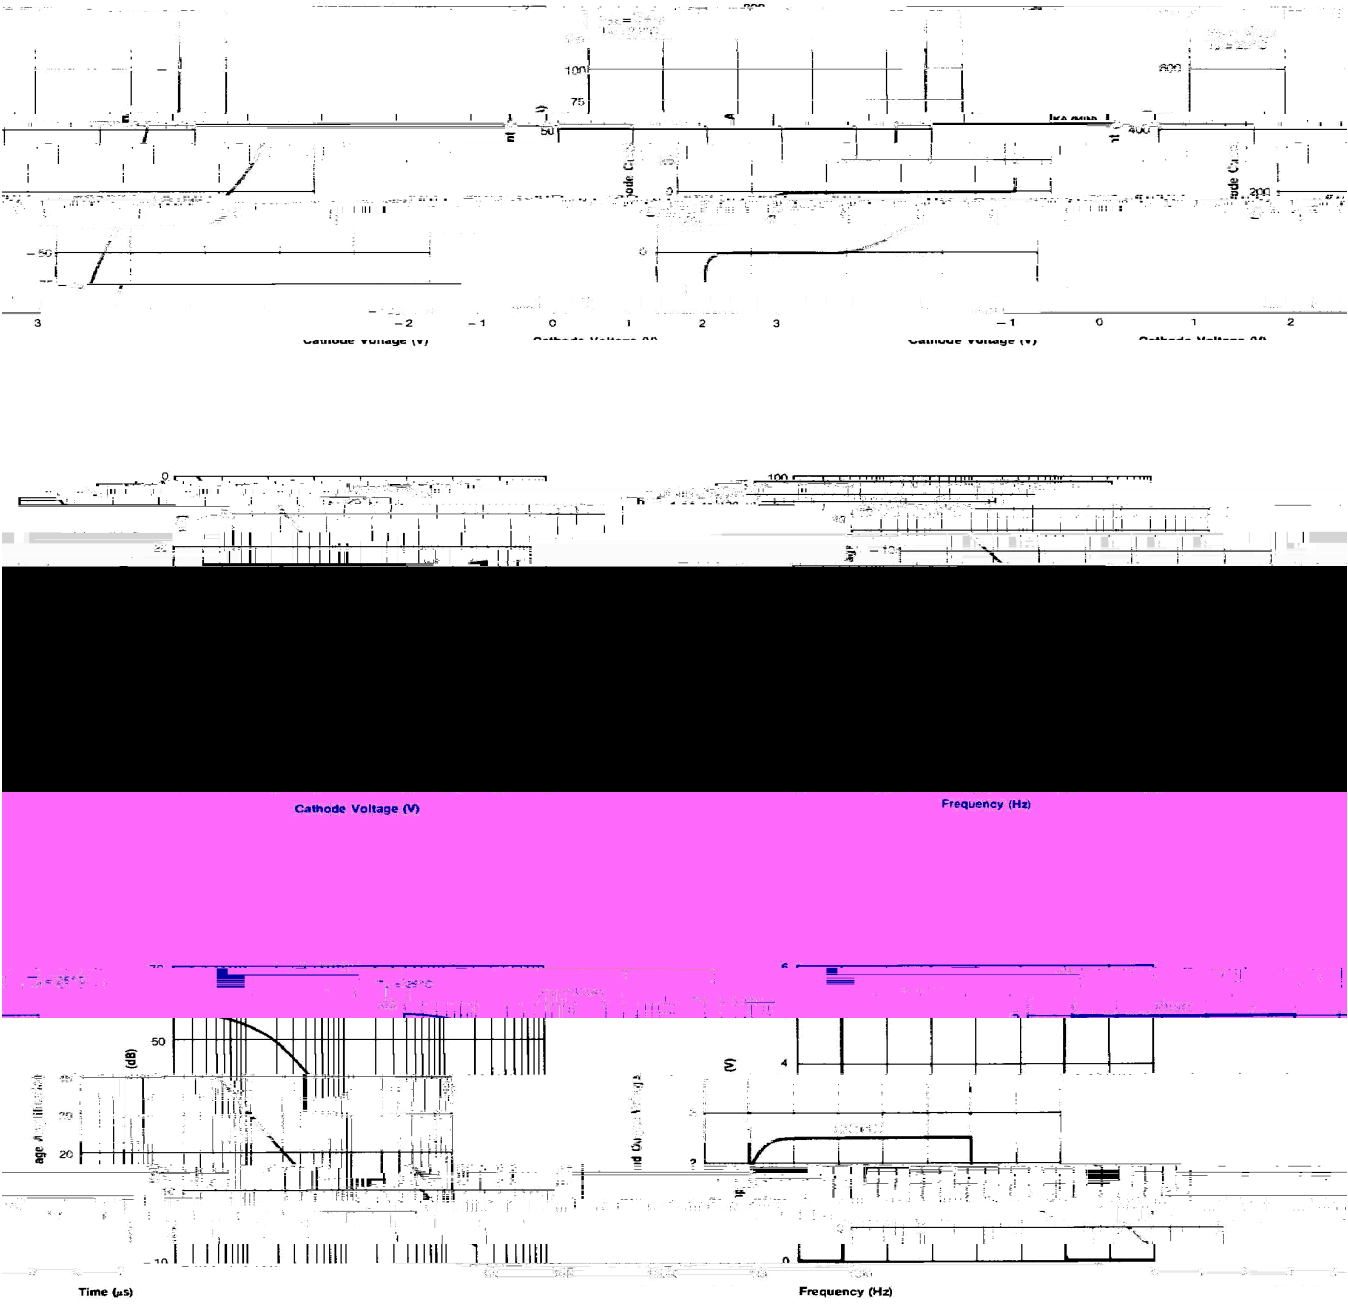

& Test circuits&Typical Application

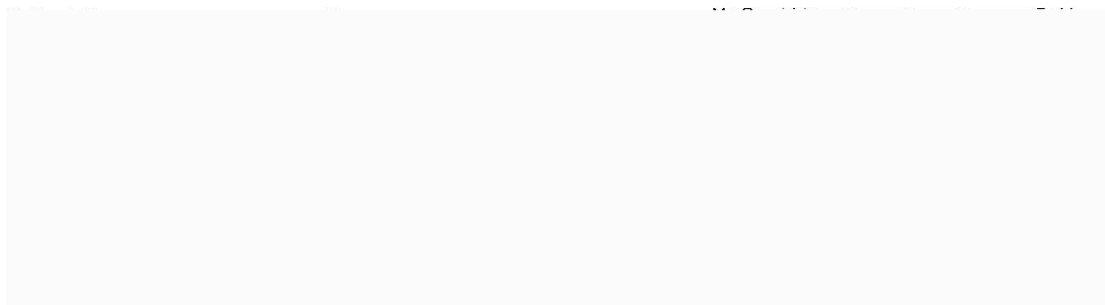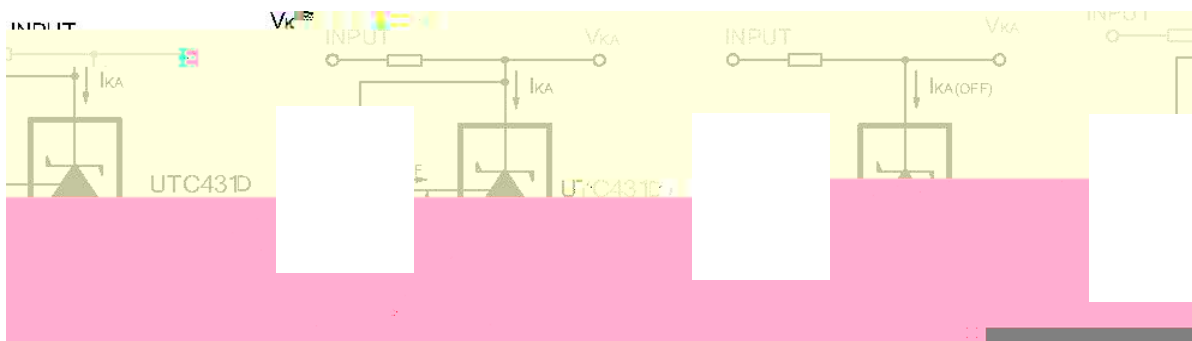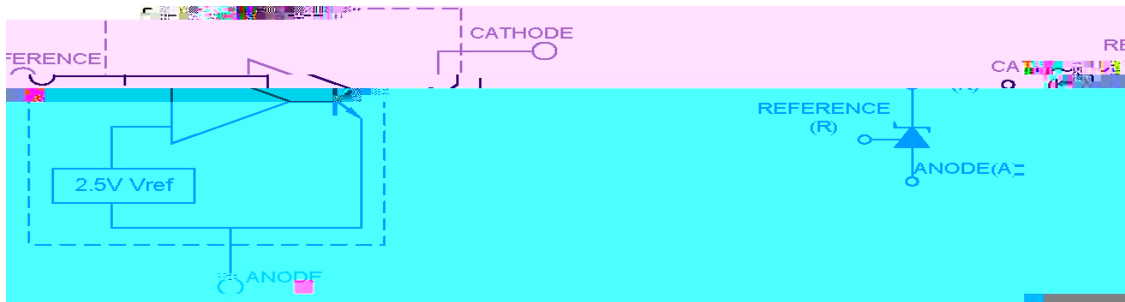


V_{KA} V_{KA}

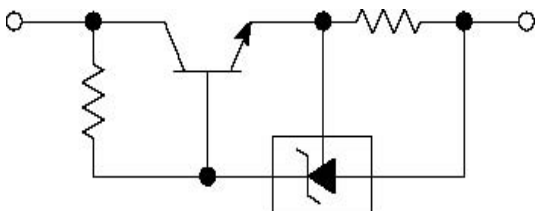


/ Package Dimensions

SOT-23

单位: mm

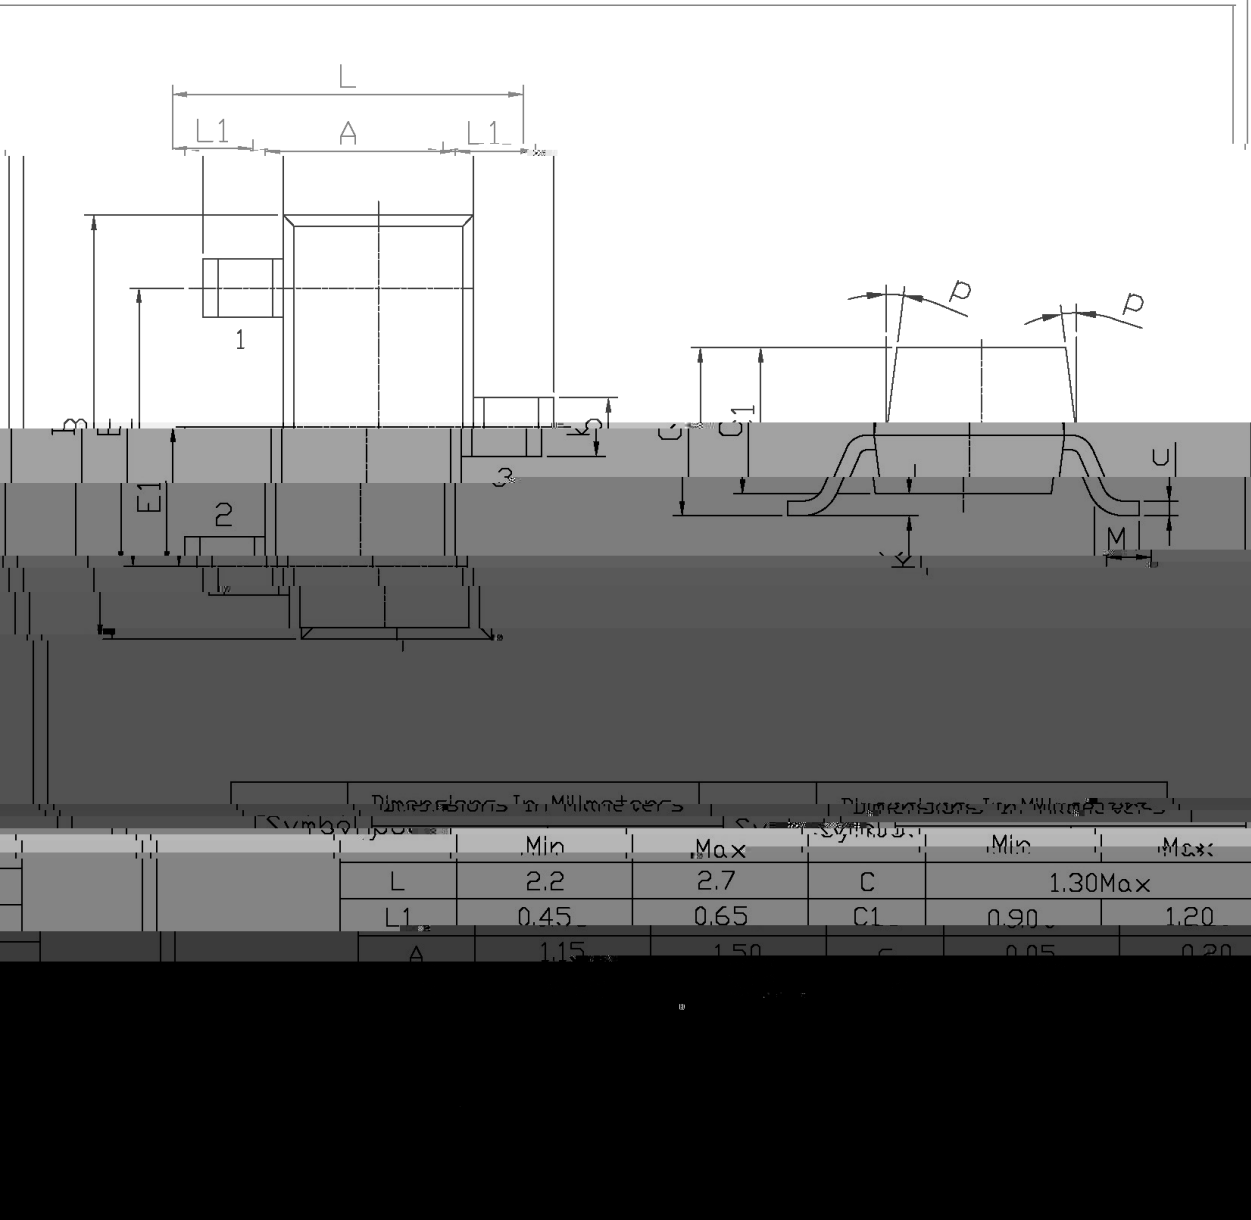


/ Marking Instructions

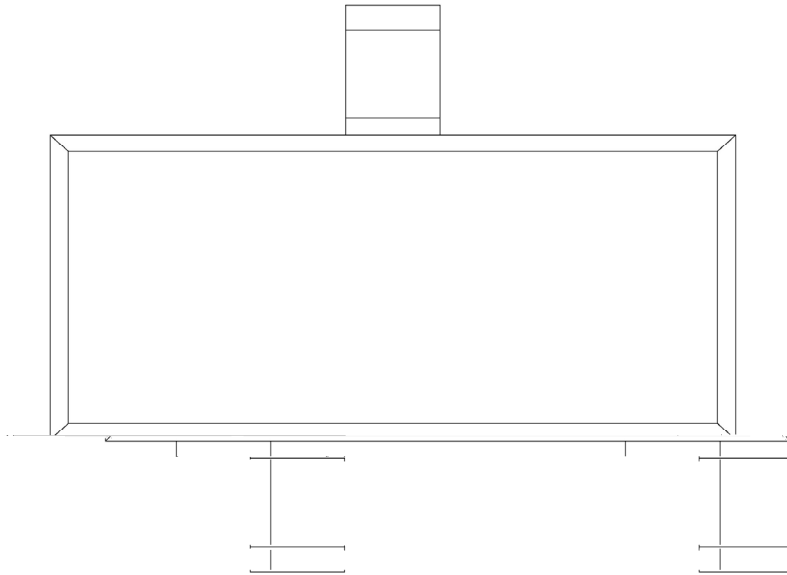

BR
431

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

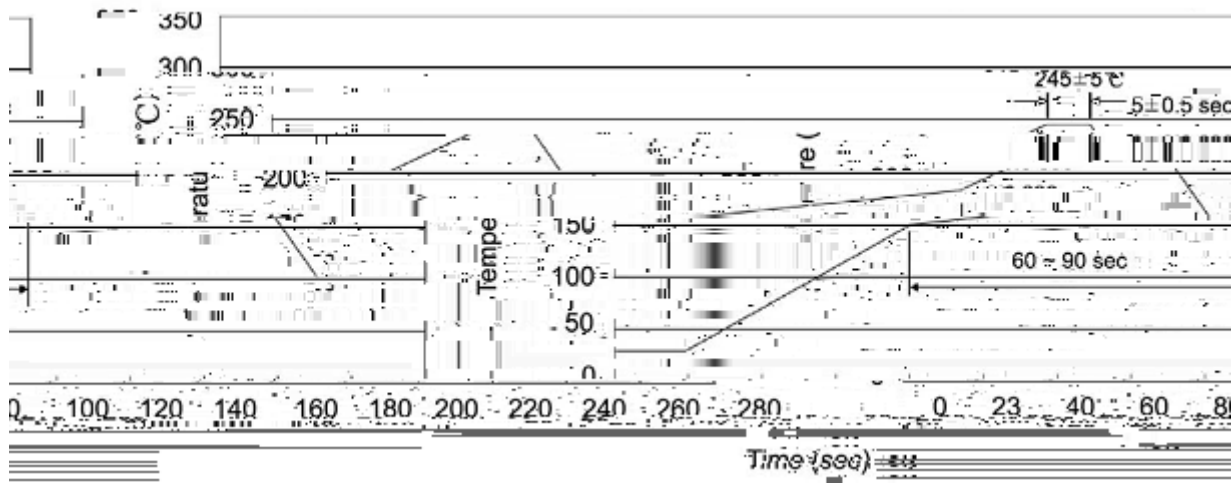

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
SOT-23	3,000	10	30,000	6	180,000	7 ×8	180×120×180	390×385×205

/ Notices