

BRMMBT2222AQ

BRMMBT2222AQ

Rev.A Dec.-2021




BRMMBT2222AQ

Rev.A Dec.-2021

DATA SHEET




/ Electrical Characteristic Curve

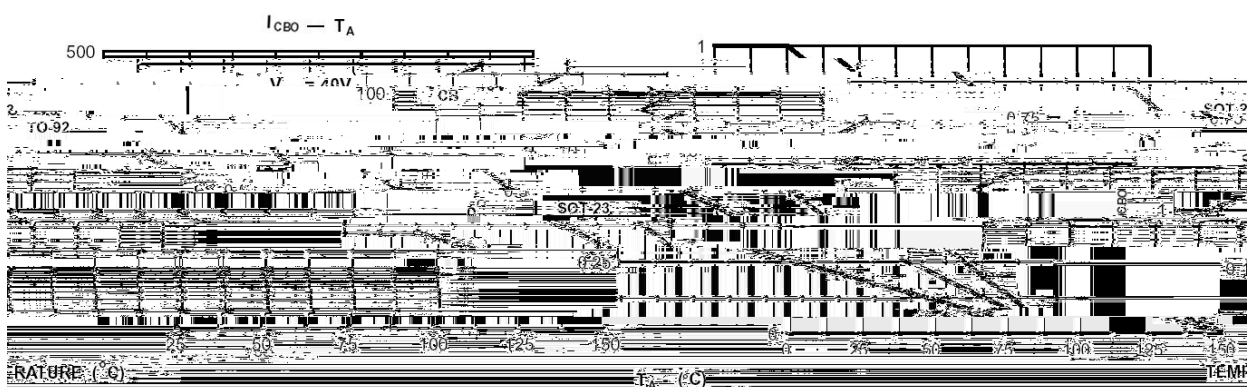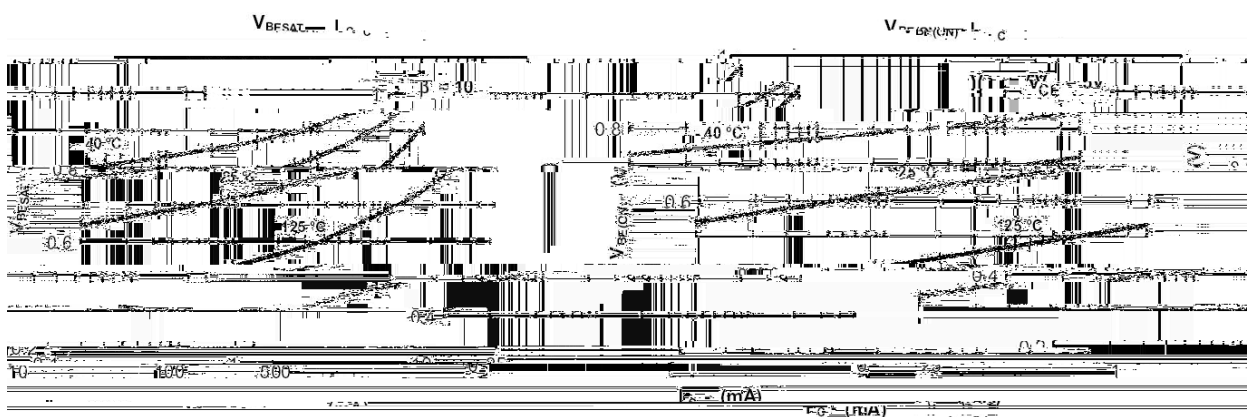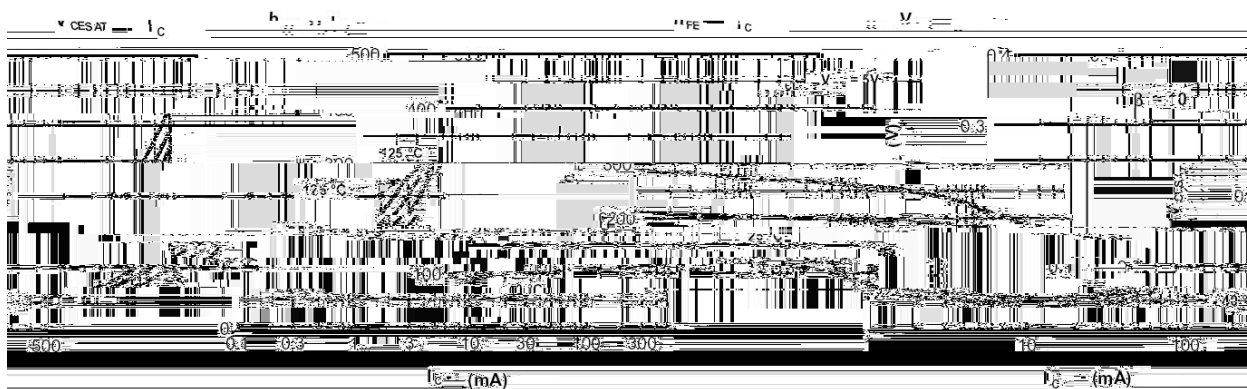


/ Package Dimensions

UNIT: mm

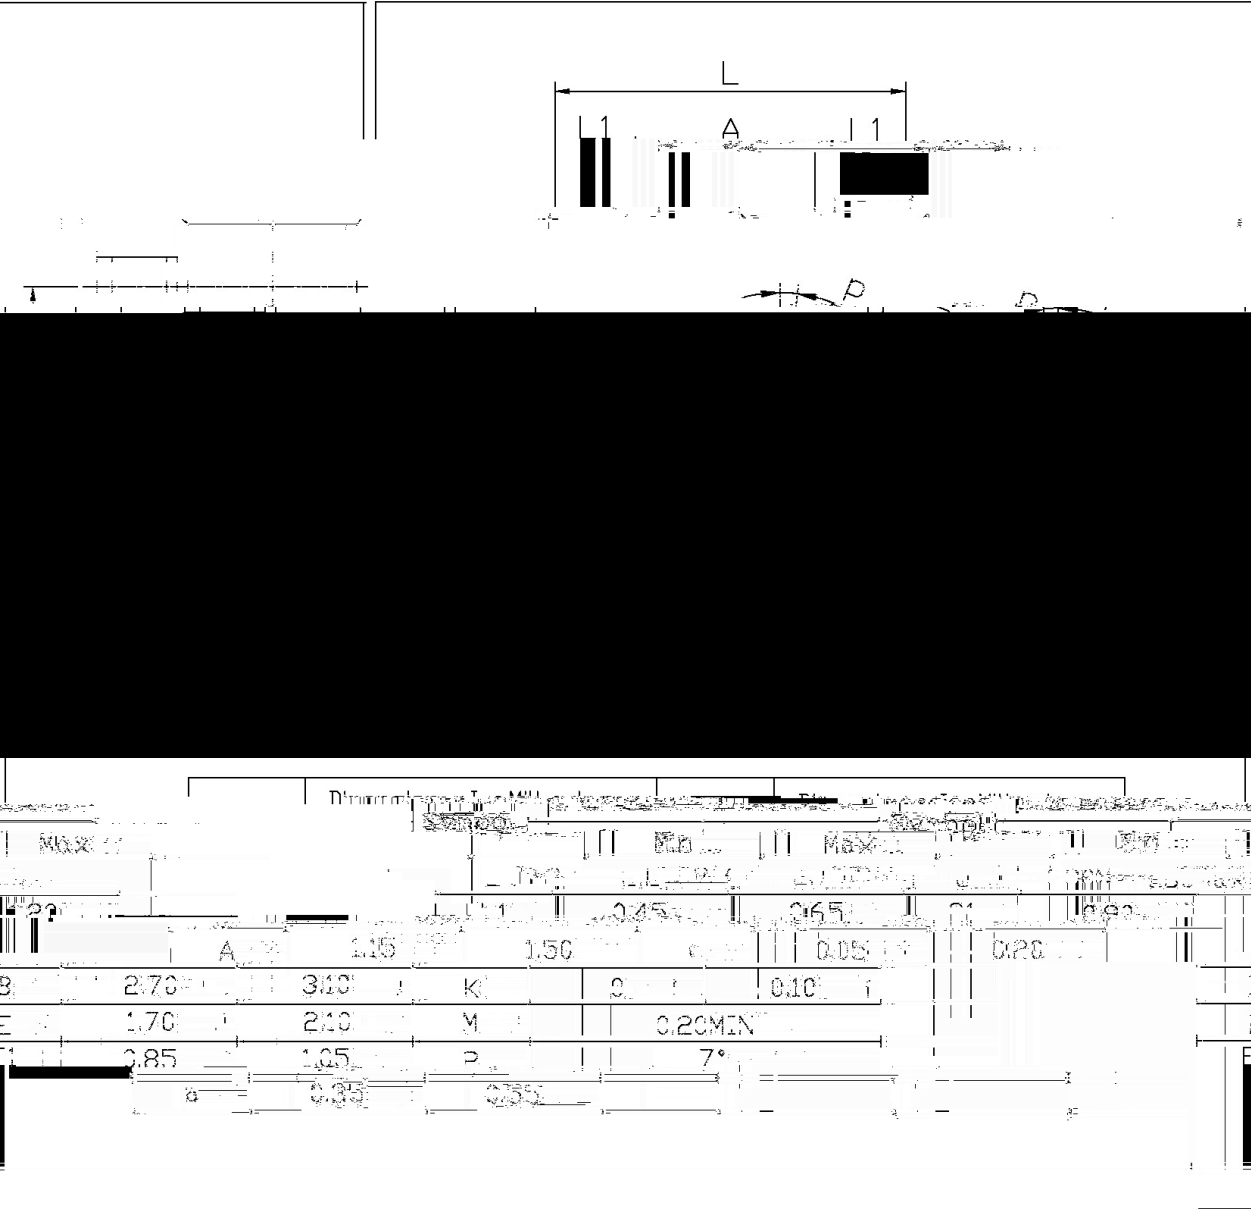



/ Marking Instructions

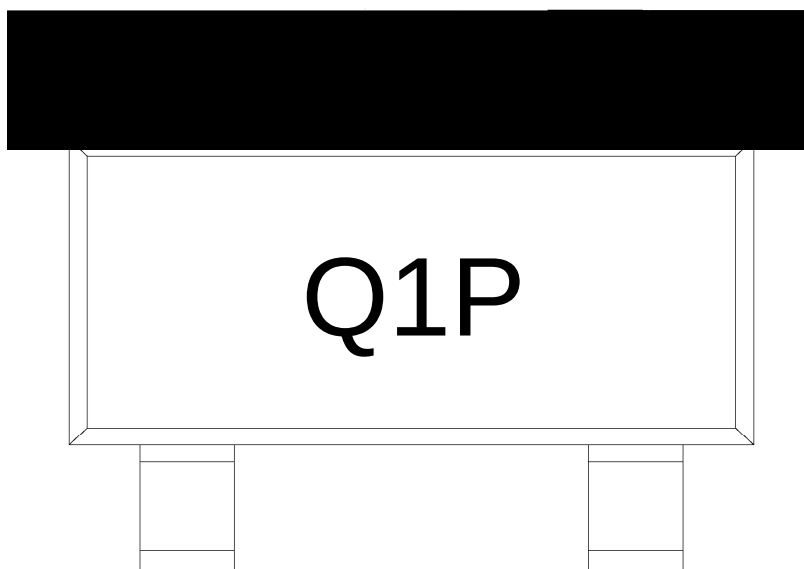

Q

1P

Note:

Q: Automobile halogen-free product Code

1P Product Type Code



() / Temperature Profile for IR Reflow Soldering(Pb-Free)

说明：

- 1、预热温度 150 ~ 200 ，时间 60 ~ 120sec;
- 2、峰值温度 255±5 ，时间持续为 5±0.5sec;
- 3、焊接制程冷却速度为 2 ~ 10°C/sec.

Note:

- 1.Preheating:150~200°C, Time:60~120sec.
- 2.Peak Temp.:255±5°C, Duration:5±0.5sec.
3. Cooling Speed: 2~10°C/sec.